



RTS 330/430/530 Sheeter





OPTIONS

- Venturi edge trim extraction
- Clear on clear label sensor
- Additional nip drive wheels
- Rotary scissor slitting, complete with removable shafts and slide out knife box for easy setting
- Razor slitting

SPECIFICATION



- Maximum web width - 330 / 410
- Maximum master roll diameter - 700mm
- Unwind spindle diameter - 25mm to 76mm
- Loop control - Ultra sonic sensor
- Minimum slit width - 25mm
- Driven nip - Servo
- Sheeting knife - Driven guillotine
- Unwind tension control - Electromagnetic brake
- Conveyor length - 1000mm
- Cutting tolerance - +/- 0.15mm
- Air pressure - 80 Psi
- Supply voltage - 230 VAC 50/60 Hz
- Supply current rating - 10 Amps

DIMENSIONS

- L: 2510mm
- D: 1150mm
- H: 1570mm

STANDARD FEATURES

- HMI - 6inch colour TFT touch screen
- Speed control pot with automated speed limitation
- Web loop control
- Braked unwind with taper tension control
- Make ready control
- End of roll detection
- Cut options
 - Cut to register from a printed mark
 - Cut to register from a inter label gap
 - Cut to a predetermined length
- When cutting to register, a sensor window can be entered so that any print between the register marks will be ignored
- Missing sensor mark/label detection
- Inline mode, with automatic speed control. Interface volt free signals are supplied as standard if required
- Sheet quantity, machine will stop once the correct quantity of sheets have been produced
- Automated conveyor speed control
- Conveyor will bunch to sheets in a predetermined quantity
- Independent Jog functions for the driven nip and conveyor
- Machine alarm conditions displayed
- Multi lingual screen

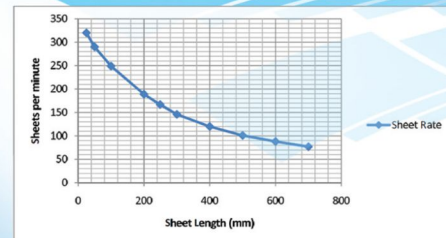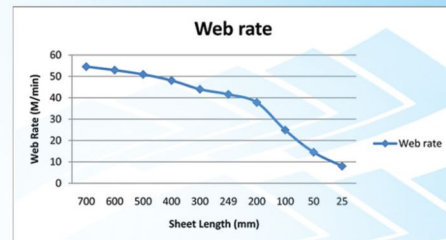

Distributor Details



A B Graphic International Ltd.

Lancaster Road, Carnaby Industrial Estate,
Bridlington, East Yorkshire, YO15 3QY.

t: +44 (0)1262 671138

f: +44 (0)1262 677009

e: info@abgint.com

w: www.abgint.com

Due to our policy of continuous improvement and development A B Graphic International reserves the right to modify or update all product specifications and functions.